



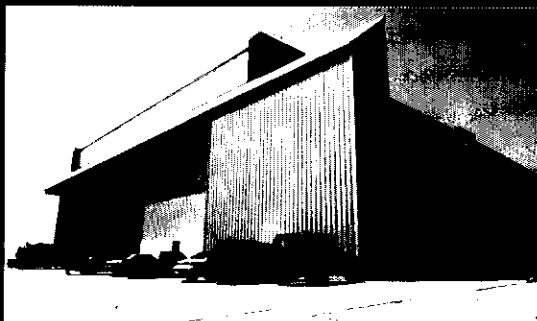

TZ FLOORPREP™/TAZ B050™

The Safe, Environmentally Friendly Way to Prepare Finished or Unfinished Concrete Floors for Coating



Spontaneous Oil/Water Splitting Cleaner with High Oil Dispersion Capability


Water Based • VOC Compliant • NO CFC's • USDA Authorized

What is TZ-FLOOR PREP™?


TZ-FLOOR PREP™ is a waterborne high performance blend of anionic and nonionic surface active agents that will remove oil, grease and dirt residue from any washable surface. It is biodegradable, non-hazardous and VOC compliant. TZ-FLOOR PREP™ is formulated for quick, thorough lifting and suspension of contaminants for easy rinsing.

TZ-FLOOR PREP™ has undergone years of field trials and testing to meet government regulations for safe, non-toxic chemicals and is authorized by the USDA for use in federally inspected meat and poultry plants.

Why TZ-FLOOR PREP™ Cleans Better than Solvents

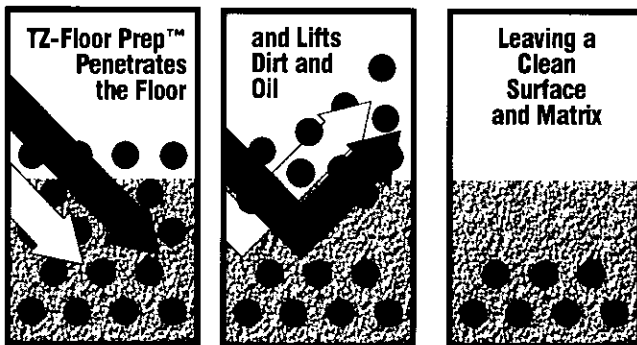


TZ-Floor Prep™ penetrates the floor substrate, loosens oil and other contaminants and lifts them up and out. Since TZ-Floor Prep™ is aqueous, the surface can be rinsed, leaving a clean surface and matrix.

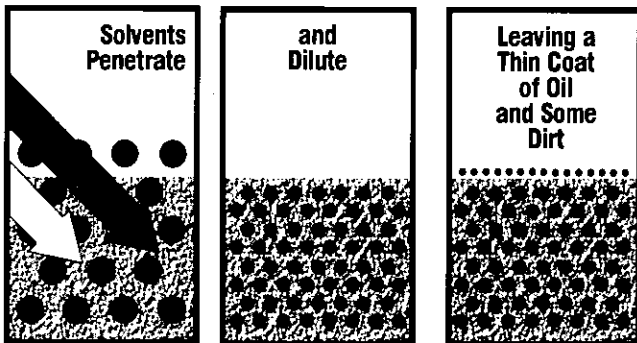

Solvents dilute and disperse oil and contaminants, driving them more deeply into the substrate, which allows them to gravitate to the surface later. The surface is left moderately clean, but with a thin coating of oil which can adversely affect bonding.

Advantages

- **Saves Money.** Reduces the need for inventory of multiple products and, in many cases, disposal fees.
- **Multi-Task Capability.** TZ-FLOOR PREP™ can be used in virtually any floor cleaning application that requires the removal of oil or grease.
- **Recyclable.** Easily separates contaminants for reclamation, disposal or reuse of cleaner.
- **High Dispersion Capability.** Reduces usage.
- **Ready-to-Use.** No wasted time on the job, no mixing mistakes.
- **Non-Abrasive.** Will not scratch metal, plastic or painted surfaces.
- **Reduces Causes of Major Workplace Problems.** Helps eliminate accidents and conditions which frequently lead to Workers' Compensation claims and employee downtime, such as slips and falls on oily floors, inhalation problems, eye damage and contact dermatitis/chemical burns.
- **USDA Authorized.** TZ-FLOOR PREP™ is acceptable as a general cleaning agent on floors and walls, or for use with steam or mechanical cleaning devices in all departments of establishments operating under the Federal meat, poultry, shell egg grading, and egg products inspection program.
- **Aqueous Based.** In many cases, after P.O.T.W. testing, the used TZ-FLOOR PREP™ is admissible into sewer treatment systems for significant savings on disposal costs.
- **Non-Toxic, Non-Flammable, Non-Hazardous.** Safer for users, low-odor, no toxic fumes. Replaces flammable solvents and caustics, while improving the safety of the work environment. Not considered or regulated as a hazardous material by either EPA or OSHA.
- **Biodegradable.** Safe for the environment.

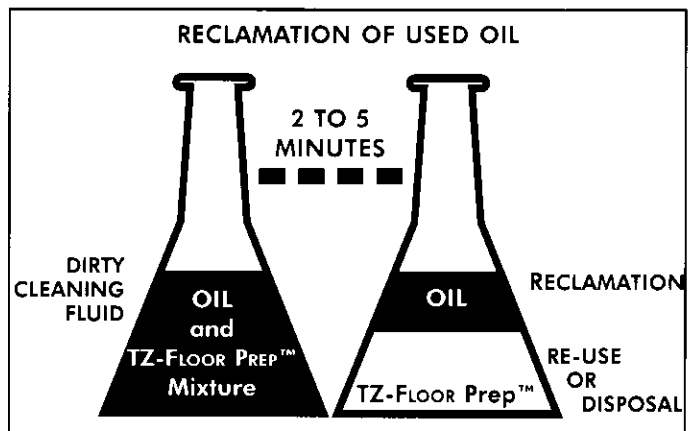

SUPERIOR ENVIRONMENTAL SAFETY

TZ-FLOOR PREP™ meets with ease the tough new environmental requirements proposed for the Los Angeles area by the South Coast Air Quality Management District (SCAQMD), i.e., VOC (<50 gms/ltr) and solvent Vapor Pressure (<5mm of Hg @ 20° C.).

**Solvent-based Chemistry No Longer
Necessary With TZ-FLOOR PREP™**

TZ-FLOOR PREP™

Applications

- **Building Maintenance**
Hotels, Schools, Offices
- **Transportation Industry**
Automobile Dealers
Trucks, Buses
Departments of Transportation
Gas and Service Stations
- **Institutional Foods**
Restaurants
Fast Food Chains
Food Processing Plants
- **Industrial**
- **Warehouses**
- **Government**
Federal, State, City Maintenance
Schools, Fire Departments
Police Departments
- **Aerospace**
- **Manufacturing**
- **Medical Institutions**




TZ-Floor Prep™ was the cleaner of choice for this 33,600 sq. ft. hangar at Tinker Air Force Base in Oklahoma City. The floor was finished with Sherwin Williams Armor Seal 1000.



TZ-Floor Prep™ cleaned up the concrete floors in these automotive service areas during working hours. Because its non-toxic and low odor, employees did not have to leave the area.

At the Texoma Peanut Plant in Madill, Oklahoma, TZ-Floor Prep™ was used to clean 41,000 sq. ft. of walls and 48,500 sq. ft. of floors. The floor was successfully finished with a urethane coating.

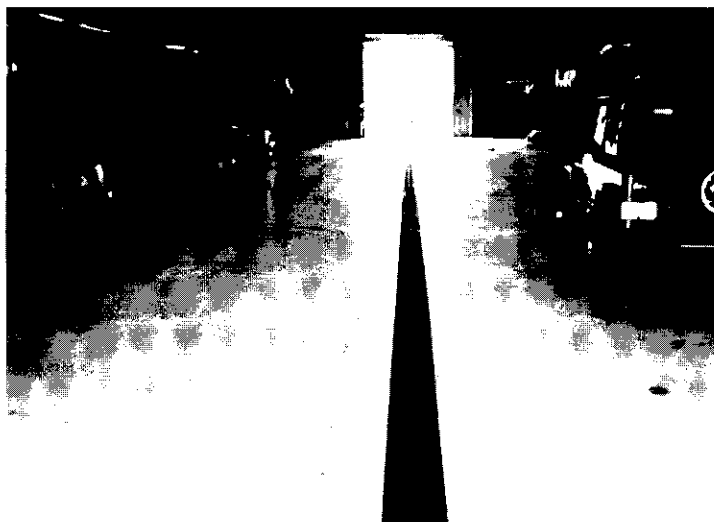

USED SUCCESSFULLY IN THESE INDUSTRIES

- *Warehouses*
- *Factories*
- *Automotive Service Areas*
- *Food Processing*
- *Institutions*
- *Medical Facilities*
- *Ramps*
- *Steel Decks*
- *Hangers*

TZ-FLOOR PREP™

Application Tips



Pour out and apply TZ-FLOOR PREP™, spread with a broom and allow to soak. No masks or special clothing is needed.

TZ-FLOOR PREP™ can be used with equipment such as a power scrubber for best results. Keep all surfaces wet with TZ-FLOOR PREP™ during cleaning



After brooming or power scrubbing, excess can be power washed or squeegeed away. Disposal is easy, because TZ-FLOOR PREP™ is not a hazardous material.



Allow to dry thoroughly. Then, the final step is to apply epoxy or other coating with a roller or squeegee. Thorough preparation with TZ-FLOOR PREP™ enhances the bond between floor and coating, thus extending the life of the finish.

Description


Physical State Liquid
 Odor Very Low
 Color Clear Amber
 pH (Typical) 10.5
 Weight 8.4 lbs./gal.
 Solubility in Water Complete
 Abrasives None
 Flash Point Non-Flammable
 Rinsability Excellent
 Biodegradable Yes

Directions

- Manually remove heavy contaminant and debris
- Apply TZ-FLOOR PREP™ sufficient to wet the surface, or soak
- Allow to set or soak for 5 - 15 minutes, keeping all surfaces wet
- Wipe, broom, power scrub, powerwash
- Rinse with water or diluted TZ-FLOOR PREP™
- Repeat where necessary

NFPA / HMIS RATINGS
 Health - 1, 1
 Flammability - 0, 0
 Reactivity - 0, 0
 Personal Protection - (), B

HAZARD INDEX
 4 - Severe Hazard
 3 - Serious Hazard
 2 - Moderate Hazard
 1 - Slight Hazard
 0 - Minimal Hazard



ORDERING INFORMATION				
TZ-Floor Prep™ Part #	Description	Pieces/Case	Case Weight	Pallet Tie X High
25001	Gallon Jugs	6/1 Gal.	52 Lbs.	9 X 3
25005	5 Gal. Pail	1/5 Gal.	46 Lbs.	12 X 3
25009	55 Gal Drum	1/55 Gal.	488 Lbs.	4 X 1



Manufactured by:
 Chemical Products Industries, Inc.
 7649 Southwest 34th Street
 Oklahoma City, OK 73179
 405/745-2070 □ FAX 405/745-2276

Aqua-Clean® patented by Phillips Petroleum Co.
 © COPYRIGHT CHEMICAL PRODUCTS INDUSTRIES, INC. 1997

